


P1SPV

Thermoplastic Rubber Ducting

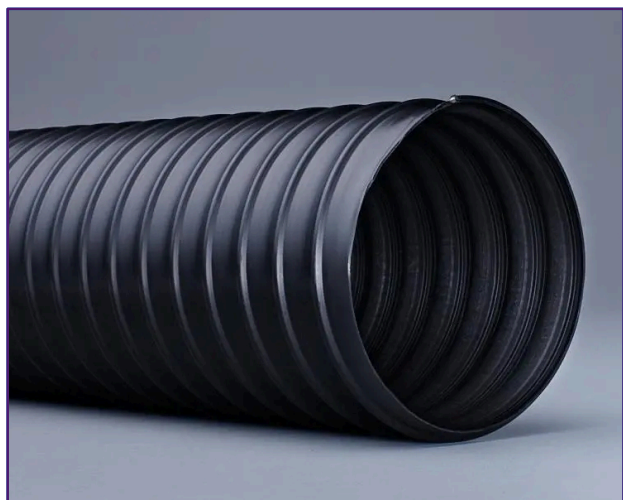

Construction: Thermoplastic rubber (TPR) flexible ducting, supported by a polypropylene coated spring steel wire helix.

Colour: Black.

Standard length: 10 metres.

Temperature range: -40°C to +135°C in a 20°C ambient.

Applications: Chemical, ventilation and automotive industries. Suction and transportation of aggressive chemical fumes and gases under mechanical influence.

Properties: Good resistance to chemical fumes. Excellent resistance to flexing. Good ozone resistance.

Options:

- Flexflyte Super.
- Over moulding of cuffs.
- P2SP.

Inside Diameter mm	Weight Kg/m	Bend Radius mm	Max. Work. Press. Bar	Max Vacuum Bar
25	0.17	25	0.90	0.60
38	0.20	38	0.90	0.60
45	0.24	45	0.80	0.60
51	0.27	51	0.70	0.50
63	0.34	63	0.60	0.50
70	0.47	70	0.60	0.50
76	0.50	76	0.50	0.50
82	0.66	82	0.50	0.50
90	0.74	90	0.50	0.50
102	0.82	102	0.40	0.40
127	1.04	180	0.30	0.30
152	1.34	190	0.30	0.30