


PU200

Polyurethane Ducting

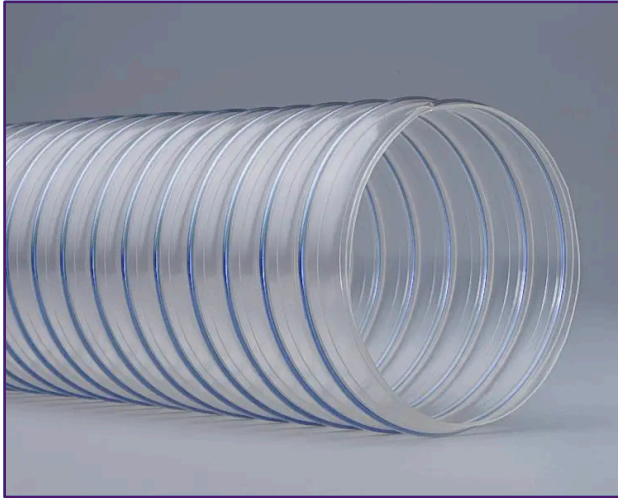

Construction: Polyester-polyurethane encapsulating a blue PVC coated spring steel wire helix.

Colour: Clear

Standard length: 10 metres

Temperature range: -40°C to +100°C in a 20°C ambient

Applications: Suction and transportation of sawdust and wood splinters, cereals, granulates, abrasives, solids and fumes in the woodworking and pharmaceutical industries.

Properties: Excellent flexibility, good abrasion resistance and compressability. Good resistance to oil and petrol fumes.

Options: Various diameters & lengths available on request

Diameter mm	Weight Kg/m	Wall Thickness mm	Bend Radius mm	Max. Work. Press. Bar	Max Vacuum Bar
38	0.20	0.4	30	0.60	0.19
45	0.22	0.4	40	0.55	0.18
51	0.26	0.4	45	0.50	0.16
63	0.28	0.4	50	0.50	0.14
76	0.32	0.4	60	0.45	0.14
82	0.34	0.4	62	0.40	0.13
89	0.38	0.4	70	0.40	0.13
102	0.64	0.4	75	0.35	0.12
115	0.69	0.4	85	0.30	0.11
127	0.80	0.4	95	0.30	0.10
140	0.88	0.4	105	0.25	0.09
152	0.96	0.4	115	0.21	0.09
160	1.01	0.4	120	0.20	0.09
178	1.12	0.4	135	0.20	0.08
203	1.26	0.4	155	0.17	0.08
228	1.45	0.4	175	0.15	0.07
254	1.60	0.4	195	0.12	0.06
279	1.73	0.4	210	0.12	0.06
305	1.92	0.4	230	0.10	0.05

Technical data at +20°C. Other diameters/lengths available upon request.