PU1220

Polyurethane ducting

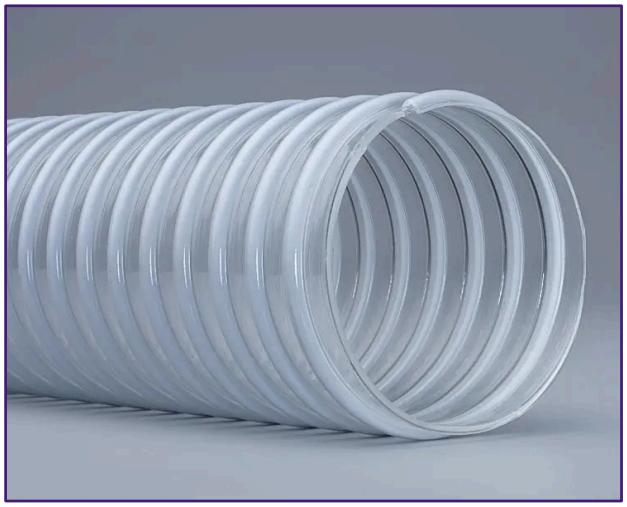

Construction: A semi rigid high impact grey PVC helix encapsulated in clear food grade polyether polyurethane.

Colour: Clear with a grey helix.

Standard length:

- 20 metres from 16mm up to and including 160mm bore.
- 10 metres from 180mm up to and including 250mm bore.

Temperature range: -30°C to +80°C in a 20°C ambient.

Applications: Suction and transportation of light abrasive materials in a wide range of industries.

Properties: FDA approved in accordance with the EU modified regulation 10/2011 and CE 1935/2004. High abrasion resistance and smooth bore. Excellent flexibility. Hydrolysis and microbe resistant.

Options:

- PU1220 AS Anti-static – additional external braided copper wire.

Inside diameter (mm)	Weight (Kg/m)	Bend Radius (mm)	Max. Work. Press. (Bar)	Max Vacuum (Bar)
16	0.10	16	1.50	0.60
20	0.14	20	1.50	0.60
25	0.16	25	1.50	0.60
32	0.21	32	1.50	0.60
38	0.26	38	1.50	0.50
51	0.33	50	1.00	0.45
65	0.46	65	1.00	0.30
76	0.58	75	1.00	0.25
80	0.63	80	1.00	0.16
90	0.73	90	1.00	0.16
102	0.88	102	0.80	0.16
127	1.075	125	0.80	0.16
140	1.28	140	0.60	0.16
152	1.44	150	0.60	0.16
160	1.60	160	0.50	0.16
180	1.91	180	0.50	0.16
203	2.22	200	0.40	0.16
250	3.00	250	0.30	0.15

Paris Hose & Ducting Ltd
c/o Specialist Ducting Supplies,
Craven House,
Steeton Grove,
Steeton, Keighley
West Yorkshire
BD20 6TT

Tel No. : 01344 758600
Fax No. : 01344 758610
E-mail : info@parishose.co.uk
Website : parishose.com