


# P4300

## Single Ply Silicone Coated Glass Fibre Ducting

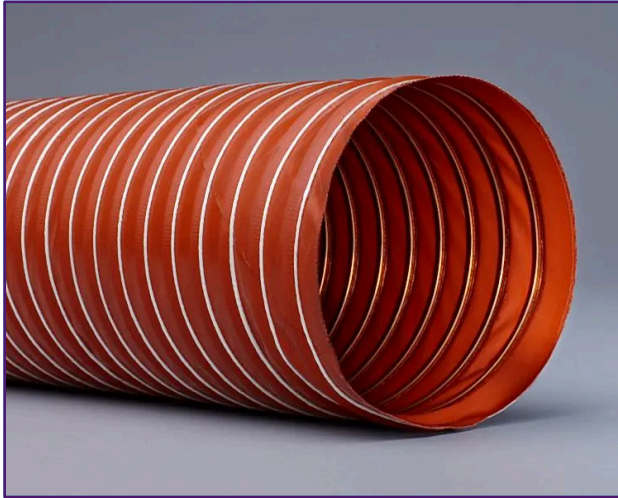

**Construction:** Single ply construction of silicone coated glass fibre fabric supported by a spring steel wire helix and having a single silicone coated fibreglass outer retention cord.

**Colour:** Red with a white cord.

**Standard length:** 4 metres.

**Temperature range:** -60°C to +300°C in a 20°C ambient.

**Applications:** Suitable for air handling and extraction, where extremes of temperature are involved.

**Properties:** Displays excellent heat ageing characteristics and low temperature flexibility.

**Options:**

- P4300L 2 ply.
- P4300LFR 2 ply Flame retardant.

Inside Diameter mm	Weight Kg/m	Bend Radius mm	Max. Work. Press. Bar	Max Vacuum Bar
25	0.15	14	1.95	0.50
38	0.20	20	1.65	0.40
51	0.30	25	1.65	0.40
63	0.36	30	1.40	0.35
76	0.46	34	1.40	0.35
83	0.51	35	1.30	0.30
89	0.53	36	1.20	0.25
102	0.60	38	1.00	0.20
127	0.85	41	0.70	0.20
152	1.10	55	0.55	0.15
160	1.18	60	0.55	0.15
178	1.28	65	0.45	0.10
203	1.43	80	0.35	0.06
254	2.06	110	0.20	0.04
305	2.47	120	0.20	0.03

Technical data at + 20°C.  
Other diameters/lengths available upon request.